

ALTOS® Loose Tube, Gel-Filled Cable

24 F, Single-mode (OS2)

CORNING

Corning ALTOS® all-dielectric cables are lightweight cables designed for duct and aerial (lashed) installation. The loose tube design provides stable performance over a wide temperature range and is compatible with any telecommunications-grade optical fiber.

Features and Benefits

Flexible, craft-friendly buffer tubes

Facilitate easy routing in closures

SZ-stranded, loose tube design

Isolates fibers from installation and environmental rigors and facilitates mid-span access

Dielectric central strength member

No preferential bend and requires no bonding or grounding


Medium-density polyethylene jacket

Rugged, durable and easy to strip (while providing superior protection against UV radiation, fungus, abrasion and other environmental factors)


Standards

Approvals and Listings	USDA Rural Development Programs
-------------------------------	---------------------------------

Design and Test Criteria	Telcordia GR-20, ICEA-640
---------------------------------	---------------------------

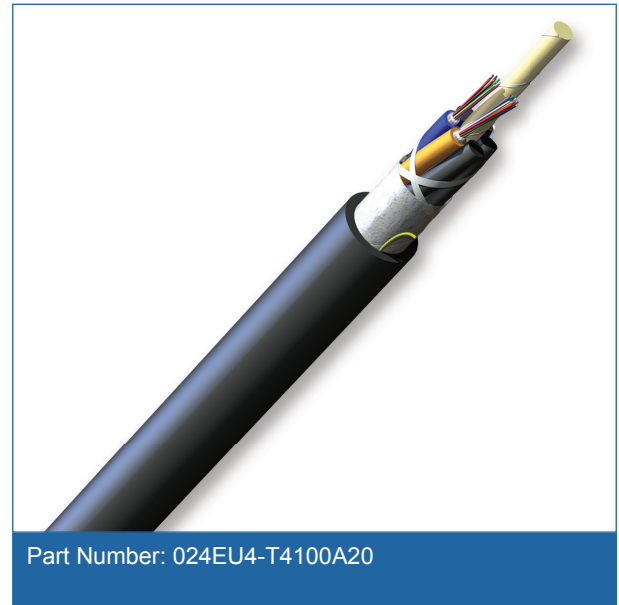

Part Number: 024EU4-T4100A20

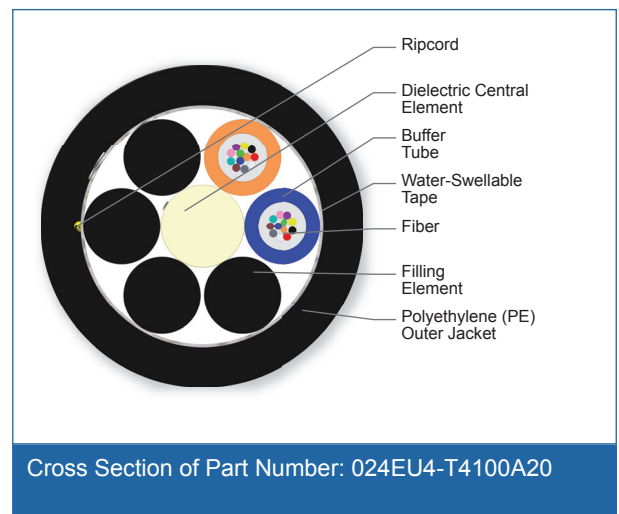

Cross Section of Part Number: 024EU4-T4100A20

CORNING

ALTOS® Loose Tube, Gel-Filled Cable

24 F, Single-mode (OS2)

CORNING

Specifications

General Specifications

Environment	Outdoor
Application	Aerial, Duct
Cable Type	Loose Tube
Product Type	Dielectric
Fiber Category	Single-mode (OS2)

Temperature Range

Storage	-40 °C to 70 °C (-40 °F to 158 °F)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)
Operation	-40 °C to 70 °C (-40 °F to 158 °F)

Cable Design

Central Element	Dielectric
Fiber Count	24
Fiber Coloring	Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua
Fibers per Tube	12
Number of Tube Positions	6
Number of Active Tubes	2
Buffer Tube Color Coding	Blue, Orange
Buffer Tube Diameter	2.5 mm (0.1 in)
Number of Filling Elements	4
Tape	Water-swellaable
Number of Ripcords	1
Outer Jacket Material	Polyethylene (PE)
Outer Jacket Color	Black
Maximum Fibers per Tube	12

Mechanical Characteristics Cable

Max. Tensile Strength, Short-Term	2700 N (600 lbf)
Max. Tensile Strength, Long-Term	890 N (200 lbf)
Weight	80 kg/km (54 lb/1000 ft)
Nominal Outer Diameter	10.5 mm (0.41 in)

CORNING

ALTOS® Loose Tube, Gel-Filled Cable

24 F, Single-mode (OS2)

CORNING

Mechanical Characteristics Cable

Min. Bend Radius Installation	158 mm (6.2 in)
Min. Bend Radius Operation	105 mm (4.1 in)

Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
------	---

Fiber Specifications

Optical Characteristics (cabled)

Fiber Name	Single-mode (OS2)
Fiber Category	G.652.D
Fiber Code	E
Performance Option Code	00
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum Attenuation	0.35 dB/km / 0.35 dB/km / 0.25 dB/km

Ordering Information

Part Number	024EU4-T4100A20
Product Description	ALTOS® Loose Tube, Gel-Filled Cable, 24 F, Single-mode (OS2)
EAN Code	4056418186313



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING