

# FREEDM® Ribbon, Gel-Filled Cable, Riser

72 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

Corning FREEDM® ribbon riser cables are lightweight cables designed for indoor/outdoor installations such as campus backbones in aerial, duct and riser applications. A UV-resistant, flame-retardant jacket allows added flexibility in placing this cable outdoors, whether it is an aerial, duct or direct-buried application, or indoor general horizontal or riser applications.

The cable consists of a ribbon stack of 12-fiber ribbons within a gel-filled central buffer tube. With easily accessible individual 250 µm colored fibers, the ribbons have readily identifiable ribbon ID numbers and fiber colors. The precise fiber and ribbon geometries result in excellent mass splicing yields. Surrounding the tube are dielectric strength members that provide tensile strength and innovative waterblocking tapes that reduce cable weight and preparation time. This design is also compatible with standard ribbon cable procedures and hardware for easy field installation and reduced labor costs.

*Note: This cable is available in 12 different jacket colors – blue, orange, green, brown, slate, white, red, black, yellow, violet, rose and aqua. The colored jacket allows for easy visual identification of the cables while still providing all of the required environmental protection of an indoor/outdoor cable jacket. Black is the standard jacket color using the part numbers shown here. Contact Customer Care at 1-800-743-2675 to order other color options.*

## Features and Benefits

### Precise fiber and ribbon geometries

Excellent mass splicing yields

### Waterblocked cable

Enables use of cables for outdoor applications

### 12-fiber ribbons with ribbon IDs

Easy identification

### UV-resistant, flame-retardant jacket

Rugged, durable and easy to strip

### Available in preconnectorized assemblies


Easy field installation and reduced labor costs

### Common installations

Outdoor aerial and duct; indoor vertical riser and general purpose horizontal according to NEC Article 770



Part Number: 072ZCF-14101-20

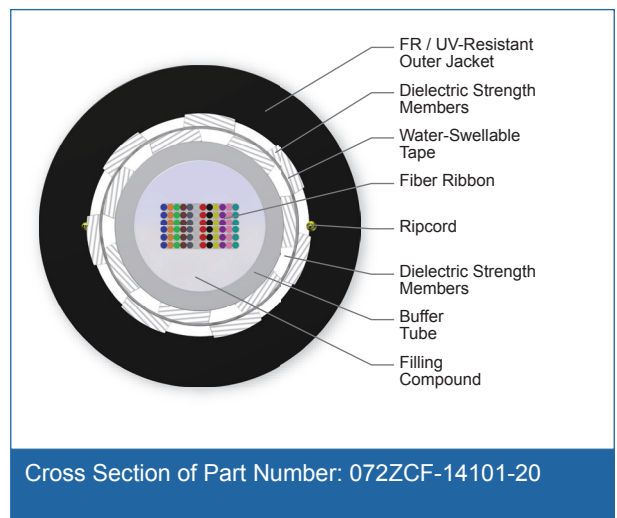

Cross Section of Part Number: 072ZCF-14101-20

CORNING

# FREEDM® Ribbon, Gel-Filled Cable, Riser

72 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

## Standards

### Listings

National Electrical Code®  
(NEC®) OFNR, FT-4

### Design and Test Criteria

ANSI/ICEA S-104-696, CSA  
OFN FT-4

## Specifications

### General Specifications

|                |                                                                           |
|----------------|---------------------------------------------------------------------------|
| Environment    | Indoor/Outdoor                                                            |
| Application    | Aerial, Direct Buried, Duct, General Purpose Horizontal, (Vertical Riser) |
| Cable Type     | Ribbon                                                                    |
| Product Type   | Dielectric                                                                |
| Flame Rating   | Riser (OFNR)                                                              |
| Fiber Category | SMF-28® Ultra fiber                                                       |

### Temperature Range

|              |                                    |
|--------------|------------------------------------|
| Storage      | -40 °C to 70 °C (-40 °F to 158 °F) |
| Installation | -10 °C to 60 °C (14 °F to 140 °F)  |
| Operation    | -40 °C to 70 °C (-40 °F to 158 °F) |

### Cable Design

|                                                     |                                                                                  |
|-----------------------------------------------------|----------------------------------------------------------------------------------|
| Fiber Count                                         | 72                                                                               |
| Ribbons per Tube                                    | 6                                                                                |
| Fibers per Ribbon                                   | 12                                                                               |
| Fiber Coloring                                      | Blue, Orange, Green, Brown, Slate, White, Red, Black, Yellow, Violet, Rose, Aqua |
| Buffer Tube Color                                   | Natural                                                                          |
| Buffer Tube Diameter                                | 6.7 mm (0.26 in)                                                                 |
| Tensile Strength Elements and/or Armoring - Layer 1 | Dielectric strength members                                                      |
| Tape                                                | Water-Swellable                                                                  |
| Tensile Strength Elements and/or Armoring - Layer 2 | Dielectric strength members                                                      |
| Number of Ripcords                                  | 2                                                                                |
| Outer Jacket Material                               | Flame-Retardant, UV-Resistant                                                    |
| Outer Jacket Color                                  | Black                                                                            |

CORNING

# FREEDM® Ribbon, Gel-Filled Cable, Riser

72 F, SMF-28® Ultra fiber, Single-mode (OS2)

CORNING

## Mechanical Characteristics Cable

|                                   |                            |
|-----------------------------------|----------------------------|
| Max. Tensile Strength, Short-Term | 2700 N (600 lbf)           |
| Max. Tensile Strength, Long-Term  | 600 N (135 lbf)            |
| Weight                            | 157 kg/km (105 lb/1000 ft) |
| Nominal Outer Diameter            | 12.7 mm (0.50 in)          |
| Min. Bend Radius Installation     | 191 mm (7.5 in)            |
| Min. Bend Radius Operation        | 127 mm (5 in)              |

## Chemical Characteristics

|      |                                                           |
|------|-----------------------------------------------------------|
| RoHS | Free of hazardous substances according to RoHS 2011/65/EU |
|------|-----------------------------------------------------------|

## Fiber Specifications

### Optical Characteristics (cabled)

|                         |                                      |
|-------------------------|--------------------------------------|
| Fiber Name              | SMF-28® Ultra fiber                  |
| Fiber Category          | ITU-T G.657.A1                       |
| Fiber Code              | Z                                    |
| Performance Option Code | 01                                   |
| Wavelengths             | 1310 nm / 1383 nm / 1550 nm          |
| Maximum Attenuation     | 0.4 dB/km / 0.4 dB/km / 0.3 dB/km    |
| Typical Attenuation     | 0.33 dB/km / 0.33 dB/km / 0.19 dB/km |

\* For more information on typical attenuation please see the Corning whitepaper at [http://csmedia.corning.com/opcomm//Resource\\_Documents/whitepapers\\_rl/LAN-1863-AEN.pdf](http://csmedia.corning.com/opcomm//Resource_Documents/whitepapers_rl/LAN-1863-AEN.pdf)

## Ordering Information

|                     |                                                                                       |
|---------------------|---------------------------------------------------------------------------------------|
| Part Number         | 072ZCF-14101-20                                                                       |
| Product Description | FREEDM® Ribbon, Gel-Filled Cable, Riser, 72 F, SMF-28® Ultra fiber, Single-mode (OS2) |
| EAN Code            | 4056418779638                                                                         |

CORNING

# FREEDM® Ribbon, Gel-Filled Cable, Riser

72 F, SMF-28® Ultra fiber, Single-mode (OS2)

The Corning logo consists of a solid blue square with the word "CORNING" in white, uppercase, sans-serif font centered within it.

CORNING

## Notes



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks).

All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2018 Corning Optical Communications. All rights reserved.

The Corning logo consists of the word "CORNING" in a large, bold, sans-serif font.