

Pretium® Connector Housing (PCH)

two rack units, holds four CCHE connector panels

CORNING

The rack-mount Pretium® connector housings (PCH) are available in 1U, 2U and 4U sizes and mount in 19-in racks or cabinets. Combined with the modules, panels, harnesses, trunks and jumpers, they provide a tip-to-tip solution for your fibre optic network.

Features and Benefits

Compatible with Plug & Play™ Systems modules
Designed to support Plug & Play Systems applications

Splice in the housing
Saves rack space and the cost of the second housing

Removable top (1U, 2U)
Maximizes ease of access


Transparent front door (04U and 02U)
Permits viewing while protecting installed patch cords

Large removable fiber guides in front
Effectively manage high patch cord densities



Standards

RoHS	Free of hazardous substances according to RoHS 2002/95/EG
UL-Listed	United States and Canadian safety standards

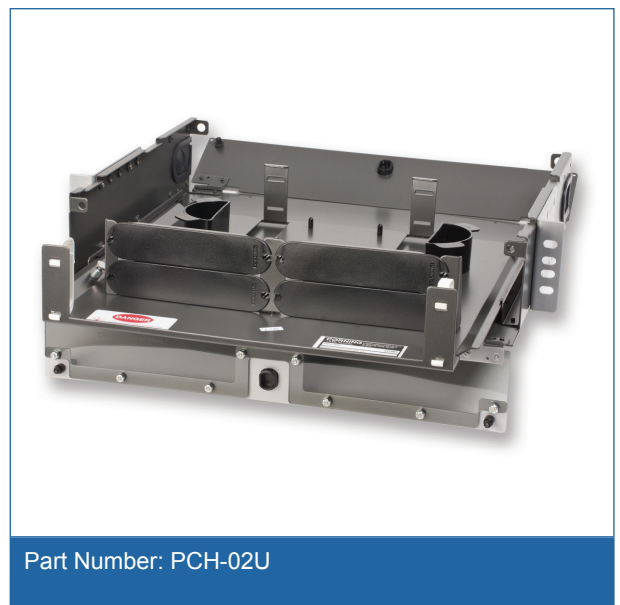

Pretium® Connector Housing (PCH)

two rack units, holds four CCHE connector panels

CORNING

Specifications

General Specifications

Application	Enterprise Networks, Data Centre
Mounting type	Rack 19", Rack 23"
Product type	Rack-Mountable Hardware

Design - Hardware

Housing type	PCH
Housing Colour	grey
Height Unit	2U
Locking Availability	Front or rear
Number of Panels per Housing	4
Panel or Module Type	CCH
Splice Tray Options	6 category, 2R, 2S, 2S-Long, 3 category 4R, 4S, 4S-Wide
Fibre Capacity	Up to 48 fibers installing FC/SC/ ST® Compatible connectors, or up to 96 installing LC connectors

Mechanical Characteristics

Dimensions (W x D x H)	431.8 mm x 419.1 mm x 88.9 mm (17 in x 16.5 in x 3.5 in)
------------------------	--

Ordering Information

Part Number	PCH-02U
Product Description	Pretium® Connector Housing, 2 rack units, holds four CCHE connector panels
EAN Code	4056418199597

Shipping Information

Units Per Delivery	1/1
Packaging Dimensions (W x D x H)	584.2 mm x 558.8 mm x 152.4 mm (23 in x 22 in x 6 in)

Pretium® Connector Housing (PCH)

two rack units, holds four CCHE connector panels

CORNING

Shipping Information

Shipping Weight	5.7 kg (12.6 lb)
Package Contents	Housing; Installation Guide; 4 blank panels; unit ID label; 2 port identification labels for 2 panels; 3 #6-32 x .25 screws; 8 #10-32 x 50 screws; 4 #12-24 x 50 screws; 8 1/8 x 4-in tie wraps, white; spiral wrap, 2 ft; central member strain-relief clamp kit; bracket for mounting UCC clamp; universal cable clamp (UCC) kit with 5 cable inserts; double-sided velcro, 5/8-in; bracket to hold BTF kit; 2 #6-32, SS nylon self-locking hex nut



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY

00 800 2676 4641 · FAX: +49 30 5303 2335 · www.corning.com/opcomm/emea

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/emea/trademarks. Corning Optical Communications is ISO 9001 and ISO 14001 certified. © 2016 Corning Optical Communications. All rights reserved.