

# Wall-Mountable Splice Center (WSC)

96 F, for up to (8) 0.2-in (Category 2S, 2M, 2R) splice trays

CORNING

The Corning wall-mountable splice center (WSC) is a cost-effective unit designed for compact, convenient storage and protection of fiber-optic splices. The WSC is engineered for use in locations where space is at a premium such as building entrance terminals, wiring closets and other controlled environments.

The WSC unit is designed for wall-mounting with a low projection from the wall. The unit may also be mounted to a 19- or 23-inch equipment rack using the optional rack-mounting kit. The WSC provides individual splice tray access for ease of use when splicing or re-entering the housing. This compact unit is an integral component of the universal transport system (UTS) and may also be used in many other applications

## Features and Benefits

Wall-mountable with an optional rack-mounting kit

Less than 5.5-in projection from the wall for space conservation


Cost effective for customer premises or remote applications

Individual splice tray access

Maximum capacity of 96 splices

Supports Single-mode and multimode applications for fusion and mechanical splices

Multiple cable entry locations to accommodate customer design specifications

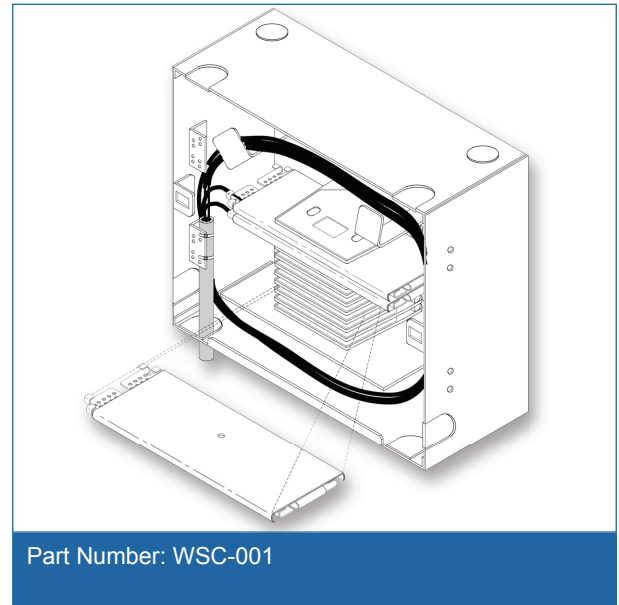

## Specifications

### General Specifications

|               |                         |
|---------------|-------------------------|
| Application   | Enterprise Networks     |
| Mounting Type | Wall-Mountable          |
| Product Type  | Wall-Mountable Hardware |

### Design - Hardware

|                     |                                               |
|---------------------|-----------------------------------------------|
| Housing Type        | WSC                                           |
| Splice Tray Options | Up to (8) category 2S, 2M, or 2R splice trays |

# Wall-Mountable Splice Center (WSC)

96 F, for up to (8) 0.2-in (Category 2S, 2M, 2R) splice trays

CORNING

## Mechanical Characteristics

|                    |                                                        |
|--------------------|--------------------------------------------------------|
| Dimensions (HxWxD) | 31.75 cm x 43 cm x 13.4 cm (12.5 in x 17 in x 5.29 in) |
|--------------------|--------------------------------------------------------|

## Ordering Information

|                     |                                                                                                   |
|---------------------|---------------------------------------------------------------------------------------------------|
| Part Number         | WSC-001                                                                                           |
| Product Description | Wall-Mountable Splice Center (WSC), 96 F, for up to (8) 0.2-in (Category 2S, 2M, 2R) splice trays |
| EAN Code            | 4056418188867                                                                                     |

## Shipping Information

|                    |                 |
|--------------------|-----------------|
| Units per Delivery | 1/1             |
| Shipping Weight    | 5.45 kg (10 lb) |

Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • [www.corning.com/opcomm](http://www.corning.com/opcomm)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/trademarks](http://www.corning.com/opcomm/trademarks). All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2016 Corning Optical Communications. All rights reserved.

CORNING