

Wall-Mountable Splice Housings (WSH)


For up to (16) 0.2-in (Type 2S, 2R or 2A) splice trays

CORNING

Corning wall-mountable splice housing (WSH) provides storage and protection of fiber splices in individually accessible trays. The wall-mountable housing is designed to store the optical fibers being spliced within the tray and can accommodate either 16 0.2-in (Type 2S or 2R) or 11 0.4-in (Type 4S or 4R) splice trays.

The front door of the housing is a work surface that can support the weight of a fusion splicer and features a lip around the door to help retain loose items. Multiple cable entry/exit locations are provided on the top and bottom and grommets prevent dust from entering the housing. Depending on the entry location of the cables into the housing, the strain-relief bracket can be moved to a variety of positions. The design also includes the Corning universal cable clamp and provisions for mounting an optional grounding kit.

The WSH can be used in conjunction with a wall-mountable connector housing (WCH) for termination. The cable entry/exit locations line up with cable entries on the WCH-12P.

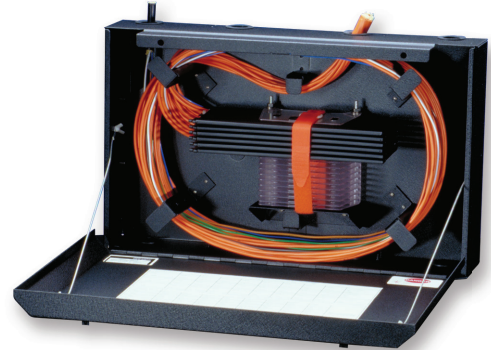

Part Number: WSH-16SPT

Features and Benefits

Front door can be used as a work surface

Convenience for splicing

Use with LANscape® Solutions WCH-12P

System compatibility

Provides midspan access capability

System access

Universal cable clamp

Standards

RoHS

Free of hazardous substances according to RoHS 2002/95/EG

CORNING

Wall-Mountable Splice Housings (WSH)

For up to (16) 0.2-in (Type 2S, 2R or 2A) splice trays

CORNING

Specifications

General Specifications

Application	Enterprise Networks
Mounting Type	Wall-Mountable
Product Type	Wall-Mountable Hardware

Design - Hardware

Housing Type	WSH
Splice Tray Options	Up to (16) 0.2-in (Type 2S, 2R or 2A) splice trays

Mechanical Characteristics

Dimensions (HxWxD)	34 cm x 57 cm x 13 cm (13.5 in x 22.5 in x 5.2 in)
--------------------	--

Ordering Information

Part Number	WSH-16SPT
Product Description	Wall-Mountable Splice Housings (WSH), for up to (16) 0.2-in (Type 2S, 2R or 2A) splice trays

Shipping Information

Units per Delivery	1/1
Package Contents	Wall-Mountable Splice Housing; installation guide; unit label; 4 nylon lock nuts, 6-32 SS; 4 wing nuts 6-32; spiral wrap (6 ft); 2 UCC strain-relief kits; 2 UCC mounting brackets; 2 strength member strain-relief kits; 2 strain-relief brackets and 12 tie wraps, 1/8 x 4-in
Shipping Weight	4.1 kg (9 lb)



Corning Optical Communications LLC • PO Box 489 • Hickory, NC 28603-0489 USA

800-743-2675 • FAX: 828-325-5060 • International: +1-828-901-5000 • www.corning.com/opcomm

A complete listing of the trademarks of Corning Optical Communications is available at www.corning.com/opcomm/trademarks. All other trademarks are the properties of their respective owners. Corning Optical Communications is ISO 9001 certified.

© 2015 Corning Optical Communications. All rights reserved.

CORNING